

**(19) World Intellectual Property
Organization
International Bureau**



1 2 3 4 5 6 7 8 9 10 11 12 13 14 15 16 17 18 19 20 21 22 23 24 25 26 27 28 29 30 31 32 33 34 35 36 37 38 39 40 41 42 43 44 45 46 47 48 49 50 51 52 53 54 55 56 57 58 59 60 61 62 63 64 65 66 67 68 69 70 71 72 73 74 75 76 77 78 79 80 81 82 83 84 85 86 87 88 89 90 91 92 93 94 95 96 97 98 99 100 101 102 103 104 105 106 107 108 109 110 111 112 113 114 115 116 117 118 119 120 121 122 123 124 125 126 127 128 129 130 131 132 133 134 135 136 137 138 139 140 141 142 143 144 145 146 147 148 149 150 151 152 153 154 155 156 157 158 159 160 161 162 163 164 165 166 167 168 169 170 171 172 173 174 175 176 177 178 179 180 181 182 183 184 185 186 187 188 189 190 191 192 193 194 195 196 197 198 199 200 201 202 203 204 205 206 207 208 209 210 211 212 213 214 215 216 217 218 219 220 221 222 223 224 225 226 227 228 229 230 231 232 233 234 235 236 237 238 239 240 241 242 243 244 245 246 247 248 249 250 251 252 253 254 255 256 257 258 259 260 261 262 263 264 265 266 267 268 269 270 271 272 273 274 275 276 277 278 279 280 281 282 283 284 285 286 287 288 289 290 291 292 293 294 295 296 297 298 299 300 301 302 303 304 305 306 307 308 309 310 311 312 313 314 315 316 317 318 319 320 321 322 323 324 325 326 327 328 329 330 331 332 333 334 335 336 337 338 339 340 341 342 343 344 345 346 347 348 349 350 351 352 353 354 355 356 357 358 359 360 361 362 363 364 365 366 367 368 369 370 371 372 373 374 375 376 377 378 379 380 381 382 383 384 385 386 387 388 389 390 391 392 393 394 395 396 397 398 399 400 401 402 403 404 405 406 407 408 409 410 411 412 413 414 415 416 417 418 419 420 421 422 423 424 425 426 427 428 429 430 431 432 433 434 435 436 437 438 439 440 441 442 443 444 445 446 447 448 449 450 451 452 453 454 455 456 457 458 459 460 461 462 463 464 465 466 467 468 469 470 471 472 473 474 475 476 477 478 479 480 481 482 483 484 485 486 487 488 489 490 491 492 493 494 495 496 497 498 499 500 501 502 503 504 505 506 507 508 509 510 511 512 513 514 515 516 517 518 519 520 521 522 523 524 525 526 527 528 529 530 531 532 533 534 535 536 537 538 539 540 541 542 543 544 545 546 547 548 549 550 551 552 553 554 555 556 557 558 559 560 561 562 563 564 565 566 567 568 569 570 571 572 573 574 575 576 577 578 579 580 581 582 583 584 585 586 587 588 589 590 591 592 593 594 595 596 597 598 599 600 601 602 603 604 605 606 607 608 609 610 611 612 613 614 615 616 617 618 619 620 621 622 623 624 625 626 627 628 629 630 631 632 633 634 635 636 637 638 639 640 641 642 643 644 645 646 647 648 649 650 651 652 653 654 655 656 657 658 659 660 661 662 663 664 665 666 667 668 669 670 671 672 673 674 675 676 677 678 679 680 681 682 683 684 685 686 687 688 689 690 691 692 693 694 695 696 697 698 699 700 701 702 703 704 705 706 707 708 709 710 711 712 713 714 715 716 717 718 719 720 721 722 723 724 725 726 727 728 729 730 731 732 733 734 735 736 737 738 739 740 741 742 743 744 745 746 747 748 749 750 751 752 753 754 755 756 757 758 759 760 761 762 763 764 765 766 767 768 769 770 771 772 773 774 775 776 777 778 779 780 781 782 783 784 785 786 787 788 789 790 791 792 793 794 795 796 797 798 799 800 801 802 803 804 805 806 807 808 809 810 811 812 813 814 815 816 817 818 819 820 821 822 823 824 825 826 827 828 829 830 831 832 833 834 835 836 837 838 839 840 841 842 843 844 845 846 847 848 849 850 851 852 853 854 855 856 857 858 859 860 861 862 863 864 865 866 867 868 869 870 871 872 873 874 875 876 877 878 879 880 881 882 883 884 885 886 887 888 889 890 891 892 893 894 895 896 897 898 899 900 901 902 903 904 905 906 907 908 909 910 911 912 913 914 915 916 917 918 919 920 921 922 923 924 925 926 927 928 929 930 931 932 933 934 935 936 937 938 939 940 941 942 943 944 945 946 947 948 949 950 951 952 953 954 955 956 957 958 959 960 961 962 963 964 965 966 967 968 969 970 971 972 973 974 975 976 977 978 979 980 981 982 983 984 985 986 987 988 989 990 991 992 993 994 995 996 997 998 999 1000 1001 1002 1003 1004 1005 1006 1007 1008 1009 1010 1011 1012 1013 1014 1015 1016 1017 1018 1019 1020 1021 1022 1023 1024 1025 1026 1027 1028 1029 1030 1031 1032 1033 1034 1035 1036 1037 1038 1039 1040 1

(43) International Publication Date
1 April 2004 (01.04.2004)

PCT

(10) International Publication Number
WO 2004/026017 A2

- (21) International Application Number:**
PCT/US2003/025742

[US/US]; 19115 Prospect Ridge Lane, Houston, TX 77094 (US). **RING, Lev** [US/US]; 14126 Heatherhill Place, Houston, TX 77077 (US).

- (25) Filing Language: English

- (26) **Publication Language:** English

- (30) Priority Data: 60/412,177 20 September 2002 (20.09.2002) US

- (71) Applicant (for all designated States except US): ENVENTURE GLOBAL TECHNOLOGY [US/US]; 16200 A Park Row, Houston, TX 77084 (US).

- (74) Agents: MATTINGLY, Todd et al.; Haynes and Boone, LLP, 1000 Louisiana Street, Suite 4300, Houston, TX 77002-5012 (US).


- (81) Designated States (national):** AE, AG, AL, AM, AT, AU, AZ, BA, BB, BG, BR, BY, BZ, CA, CH, CN, CO, CR, CU, CZ, DE, DK, DM, DZ, EC, EE, ES, FI, GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD, MG, MK, MN, MW, MX, MY, NO, NZ, OM, PH, PL, PT, RO, RU, SC, SD, SE, SG, SK, SL, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, YU, ZA, ZM, ZW.

- (84) Designated States (regional):** ARIPO patent (GH, GM, KE, LS, MW, MZ, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European patent (AT, BE, BG, CH, CY, CZ, DE, DK, EE,

[Continued on next page]

- (75) Inventors/Applicants (for US only): SHUSTER, Mark

(54) Title: RESIDUAL STRESSES IN EXPANDABLE TUBULAR CASING

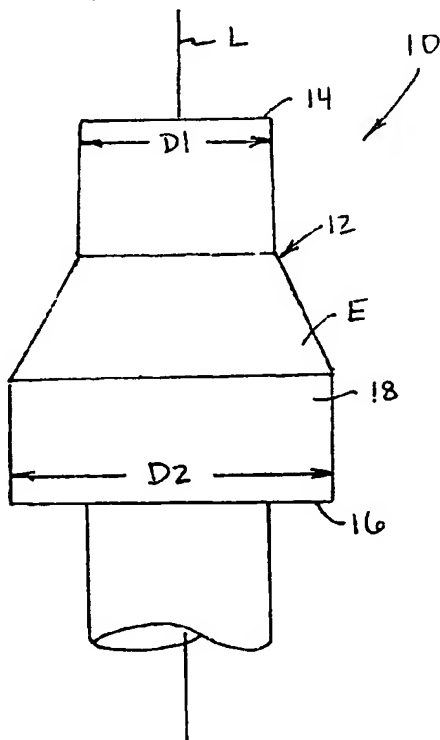

(57) Abstract: An elongated section of steel tubing has an outer circumferential surface and an inner circumferential surface defining an elongated axial passage through the tubing. An expansion mandrel is moved through the tubing for radially expanding the tubing. An impact member is provided for travel through the length of the axial passage. A plurality of movable impactors are mounted to extend from the impact member. The impactors are driven for repeated contact with the inner circumferential surface as the impact member is moved through the tubing subsequent to the expansion mandrel for contacting the expanded inner circumferential surface along the entire length of the axial passage. Movement of the impactors is ultrasonic.

WO 2004/026017 A2



ES, FI, FR, GB, GR, HU, IE, IT, LU, MC, NL, PT, RO,
SE, SI, SK, TR), OAPI patent (BF, BJ, CF, CG, CI, CM,
GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).

Published:

— without international search report and to be republished
upon receipt of that report

Declaration under Rule 4.17:

— of inventorship (Rule 4.17(iv)) for US only

For two-letter codes and other abbreviations, refer to the "Guidance
Notes on Codes and Abbreviations" appearing at the beginning
of each regular issue of the PCT Gazette.

RESIDUAL STRESSES IN EXPANDABLE TUBULAR CASING**Cross Reference To Related Applications**

[001] The present application claims the benefit of the filing dates of (1) U.S. provisional patent application serial no. 60/412,177, attorney docket no 25791.117, filed on 9/20/2002, the disclosure of which is incorporated herein by reference.

[002] The present application is related to the following: (1) U.S. patent application serial no. 09/454,139, attorney docket no. 25791.03.02, filed on 12/3/1999, (2) U.S. patent application serial no. 09/510,913, attorney docket no. 25791.7.02, filed on 2/23/2000, (3) U.S. patent application serial no. 09/502,350, attorney docket no. 25791.8.02, filed on 2/10/2000, (4) U.S. patent no. 6,328,113, (5) U.S. patent application serial no. 09/523,460, attorney docket no. 25791.11.02, filed on 3/10/2000, (6) U.S. patent application serial no. 09/512,895, attorney docket no. 25791.12.02, filed on 2/24/2000, (7) U.S. patent application serial no. 09/511,941, attorney docket no. 25791.16.02, filed on 2/24/2000, (8) U.S. patent application serial no. 09/588,946, attorney docket no. 25791.17.02, filed on 6/7/2000, (9) U.S. patent application serial no. 09/559,122, attorney docket no. 25791.23.02, filed on 4/26/2000, (10) PCT patent application serial no. PCT/US00/18635, attorney docket no. 25791.25.02, filed on 7/9/2000, (11) U.S. provisional patent application serial no. 60/162,671, attorney docket no. 25791.27, filed on 11/1/1999, (12) U.S. provisional patent application serial no. 60/154,047, attorney docket no. 25791.29, filed on 9/16/1999, (13) U.S. provisional patent application serial no. 60/159,082, attorney docket no. 25791.34, filed on 10/12/1999, (14) U.S. provisional patent application serial no. 60/159,039, attorney docket no. 25791.36, filed on 10/12/1999, (15) U.S. provisional patent application serial no. 60/159,033, attorney docket no. 25791.37, filed on 10/12/1999, (16) U.S. provisional patent application serial no. 60/212,359, attorney docket no. 25791.38, filed on 6/19/2000, (17) U.S. provisional patent application serial no. 60/165,228, attorney docket no. 25791.39, filed on 11/12/1999, (18) U.S. provisional patent application serial no. 60/221,443, attorney docket no. 25791.45, filed on 7/28/2000, (19) U.S. provisional patent application serial no. 60/221,645, attorney docket no. 25791.46, filed on 7/28/2000, (20) U.S. provisional patent application serial no. 60/233,638, attorney docket no. 25791.47, filed on 9/18/2000, (21) U.S. provisional patent application serial no. 60/237,334, attorney docket no. 25791.48, filed on 10/2/2000, (22) U.S. provisional patent application serial no. 60/270,007, attorney docket no. 25791.50, filed on 2/20/2001, (23) U.S. provisional patent application serial no. 60/262,434, attorney docket no. 25791.51, filed on 1/17/2001, (24) U.S. provisional patent application serial no. 60/259,486, attorney docket no. 25791.52, filed on 1/3/2001, (25) U.S. provisional patent application serial no. 60/303,740, attorney docket no. 25791.61, filed on 7/6/2001, (26) U.S. provisional patent application serial no. 60/313,453, attorney docket no. 25791.59, filed on 8/20/2001, (27) U.S. provisional patent application serial no. 60/317,985, attorney docket no. 25791.67, filed on 9/6/2001, (28) U.S. provisional patent application serial no. 60/3318,386, attorney docket no. 25791.67.02, filed on 9/10/2001, (29) U.S. utility patent application serial no. 09/969,922, attorney docket no. 25791.69, filed on 10/3/2001, (30) U.S. utility patent

application serial no. 10/016,467, attorney docket no. 25791.70, filed on 12/10/01, (31) U.S. provisional patent application serial no. 60/343,674, attorney docket no. 25791.68, filed on 12/27/2001, (32) U.S. provisional patent application serial no. 60/346,309, attorney docket no. 25791.92, filed on 1/7/2002, (33) U.S. provisional patent application serial no. 60/372,048, attorney docket no. 25791.93, filed on 4/12/02 (34) U.S. provisional patent application serial no. 60/380,147, attorney docket no. 25791.104, filed on 5/6/2002, (35) U.S. provisional patent application serial no. 60/387,486, attorney docket no. 25791.107, filed on 6/10/2002, (36) U.S. provisional patent application serial no. 60/387,961, attorney docket no. 25791.108, filed on 6/12/2002, (37) U.S. provisional patent application serial no. 60/391,703, attorney docket no. 25791.90, filed on 6/26/2002, (38) U.S. provisional patent application serial no. 60/397,284, attorney docket no. 25791.106, filed on 7/19/2002, (39) U.S. provisional patent application serial no. 60/398,061, attorney docket no. 25791.110, filed on 7/24/2002, (40) U.S. provisional patent application serial no. 60/405,610, attorney docket no. 25791.119, filed on 8/23/2002, (41) U.S. provisional patent application serial no. 60/405,394, attorney docket no. 25791.120, filed on 8/23/2002, (42) U.S. provisional patent application serial no. 60/412,177, attorney docket no. 25791.117, filed on 9/20/2002, (43) U.S. provisional patent application serial no. 60/412,653, attorney docket no. 25791.118, filed on 9/20/2002, (44) U.S. provisional patent application serial no. 60/412,544, attorney docket no. 25791.121, filed on 9/20/2002, (45) U.S. provisional patent application serial no. 60/412,187, attorney docket no. 25791.127, filed on 9/20/2002, and (46) U.S. provisional patent application serial no. 60/412,371, attorney docket no. 25791.129, filed on 9/20/2002, the disclosures of which are incorporated herein by reference.

Background of the Invention

[003] The present invention relates generally to tubular steel well casing and more particularly to enhancing residual stresses in the tubing after tubular expansion.

[004] Solid tubular casing of substantial length is used as a borehole liner in downhole drilling. The casing is comprised of end-to-end interconnected segments of steel tubing to protect against possible collapse of the borehole and to optimize well flow. The tubing often reaches substantial depths and endures substantial pressures. Sometimes, due to excessive pressure differentials, i.e. pressure within the tubing becomes much less than the external pressure acting on the tubing, one or more of the tubing segments may collapse. If so, a great amount of time and expense is needed to replace the collapsed tubing.

[005] Because the tubing is manufactured from steel, certain steps can be taken during manufacture to increase the strength of the tubing. One of the areas of great importance in achieving this is to be able to control the residual stress in the tubing. Each section of tubing has an outside diameter (OD) and an inside diameter (ID). A typical section of tubing produced today has tensile residual stresses at the OD and compressive residual stresses at the ID.

[006] It is present practice to expand the steel tubing downhole by using a mandrel. This is a cold-working process which presents substantial mechanical challenges. This technology is known as solid expandable tubular (SET) technology. This cold-working process deforms the steel without any additional heat beyond what is present in the downhole environment.

[007] An expansion cone, or mandrel, is used to permanently mechanically deform the pipe. The cone is moved through the tubing by a differential hydraulic pressure across the cone itself, and/or by a direct mechanical pull or push force. The differential pressure is pumped through an inner-string connected to the cone, and the mechanical force is applied by either raising or lowering the inner string.

[008] Progress of the cone through the tubing deforms the steel beyond its elastic limit into the plastic region, while keeping stresses below ultimate yield. Expansions greater than 20%, based on pipe ID, have been accomplished. However, most applications using 4 1/4 - 13 3/8 inch tubing have required expansions less than 20%.

[009] At the bottom of the SET system is a canister, known as the "launcher," that contains the expansion cone. The launcher is constructed of thin-wall, high-strength steel that has a thinner wall thickness than the expandable casing. Because the launcher has a thinner wall and its OD is the same as the drift of the previous casing string, it can be tripped into the hole through the previous casing string.

[0010] The difference in wall thickness of the launcher and the elastomer-coated hanger joint(s) allows the expanding pipe to be sealed, or "clad," to the previous casing string. The expanded pipe ends up with an OD that is greater than the OD of the launcher, due to its greater wall thickness. The ID of the pipe expands to the same ID of the launcher, which is a function of expansion cone OD.

[0011] When the tubing is expanded, changes take place with respect to the previously mentioned residual stresses at the OD and ID. Today's manufactured tubing typically has a negative tensile residual stress (i.e. compressive) at the OD. After expansion there are even greater negative tensile stresses at the OD. The result is that the tubular casing will have a greater potential for collapse after expansion.

[0012] One goal would be to produce manufactured tubing which initially has a positive tensile residual stress at the OD, so that after expansion, the tensile residual stress at the OD may be either zero or only slightly negative. This would result in improved collapse resistance.

[0013] It has been found that during bridge construction, an ultrasonic external impact treatment can be applied to bridge steel that converts tensile residual stress to compressive residual stress. However, there is no known way to convert such stresses in tubing, especially when the tubing is set in a borehole.

[0014] It would therefore be beneficial to be able to treat tubing, especially in a downhole environment, so that after expansion, the residual stress at the OD could be optimized for collapse resistance.

Summary Of The Invention

[0015] One embodiment accordingly, provides an apparatus and method for treating steel tubing. To this end, the apparatus includes an impact member, a plurality of movable impactors mounted to extend from the impact member, and an impact driver connected to move the impactors into repeated contact with an interior surface of the tubing circumferentially surrounding the impact member.

[0016] A principle advantage of this embodiment is that the impacting converts the residual stresses at the tubing ID to compressive stresses, which results in the residual stresses at the OD being tensile residual stresses.

Brief Description of the Drawings

[0017] Fig. 1 is a side view illustrating an embodiment of an expansion mandrel.

[0018] Figs. 2A-C are side views illustrating an embodiment of an expansion mandrel and a resulting expanded casing.

[0019] Fig. 3 is a cross-sectional view of the casing taken along the line 3-3 of Fig. 2C, before impacting.

[0020] Figs. 4 and 5 are schematic illustrations of embodiments of impactors.

[0021] Fig. 6 is a cross-sectional view of the casing of Fig. 3, after impacting.

[0022] Fig. 7 is a perspective view schematically illustrating another embodiment of an impact member.

[0023] Fig. 8 is a perspective view schematically illustrating an embodiment of a mandrel used during a manufacturing process for a length of casing.

Detailed Description of the Illustrative Embodiments

[0024] An expansion mandrel is generally designated 10 in Fig. 1, and includes a main body 12 having a longitudinal axis L which extends between a first end 14 and a second end 16 of the main body 12. An external surface 18 of body 12 has a first diameter D1 at first end 14, and a second diameter D2, larger than D1, at second end 16, interconnected by a tapered expansion portion E. The first end 14 of body 12 is a leading end being of the smaller diameter D1, and the second end 16 is a trailing end being of the larger diameter D2.

[0025] Mandrel 10, Figs. 2A, 2B and 2C, is used for expanding an elongated section of steel casing 30 defining an elongated passage 32 therein. Mandrel 10 is positioned, for example in a position A, Fig. 2A, and is axially moved through the passage 32 to an exemplary position B, Fig. 2B, and position C, Fig. 2C, to expand passage 32 from an original diameter O to an expanded final diameter F.

[0026] After expansion, as described above, the residual stresses in the casing 30 are changed, Fig. 3, which illustrates a section of the expanded casing 30 having increased negative tensile (i.e. compressive) residual stresses at the OD and positive tensile residual stresses at the ID divided by a concentric mid plane 38.

[0027] In order to enhance collapse resistance of the expanded casing, an impact member 40, Fig. 4, includes a plurality of movable impactors 42 mounted to extend from a rotating impact member 40, as indicated by the directional arrow designated R, an impact driver 44 is connected to ultrasonically move the impactors 42 into repeated contact with the ID of casing 30 as impact member 40 rotates. In this embodiment, the impactors 42 can be reciprocally movable as indicated in phantom.

[0028] The impact member 40 may be moved through the passage 32 following expansion by the mandrel 10. This can be accomplished by combining the impact member 40 with mandrel 10, Fig. 4, or by attaching an impact member 40, Fig. 5, to follow mandrel 10 through passage 32. The ultrasonic impacting can also be applied to treat casing as part of the manufacturing process prior to downhole positioning.

[0029] As a result of the foregoing ultrasonic impacting, the residual stress at the OD of casing 30, Fig. 6, can be optimized for collapse resistance so that there is an increased negative tensile residual stress at the ID resulting in an increased positive tensile residual stress at the OD. In addition to ultrasonic impacting, a shot peening process, a vibration process, or a pneumatic blast process, for example, generated from an impact member 40x, Fig. 7, moved within the passage 32 along a path P, can be used to provide the increased negative tensile residual stress at the ID.

[0030] The foregoing suggests increasing collapse resistance through different residual stress distribution.

[0031] It is possible to create opposite residual stress distribution during pipe manufacturing (tensile residual stresses on the OD and compressive residual stress on the ID surfaces). This is an improvement over the conventional value of the stresses that we have today. This can be achieved in pipe manufacturing by a combination of the rolling, heating and cooling procedures and process parameters. For instance elimination of the final sizing will lead to significantly decreasing the level of the compressive residual stress, or even to tensile residual stress on pipe OD. Also, a mandrel 100, Fig. 8, can be positioned and moved relative to passage 32 of casing 30 during the manufacturing process, sufficient to provide the increased negative tensile stress at the ID.

[0032] Another approach is stress relieving the welded pipe after manufacturing by longer or better tempering or ultrasonic impact treatment.

[0033] And finally, applying the ultrasonic impact treatment in-situ (i.e., down hole) during or immediately after expansion.

[0034] Although illustrative embodiments have been shown and described, a wide range of modification, change and substitution is contemplated in the foregoing disclosure and in some instances, some features of the embodiments may be employed without a corresponding use of other features. Accordingly, it is appropriate that the appended claims be construed broadly and in a manner consistent with the scope of the embodiments disclosed herein.

Claims

What is claimed is:

1. An apparatus for treating steel tubing comprising:
 - an impact member;
 - a plurality of movable impactors mounted to extend from the impact member; and
 - an impact driver connected to move the impactors into repeated contact with an interior surface of the tubing which circumferentially surrounds the impact member.
2. The apparatus as defined in claim 1 wherein the impactors are reciprocally movable.
3. The apparatus as defined in claim 1 wherein the impact member is rotatably movable.
4. The apparatus as defined in claim 1 wherein the movement of the impactors is ultrasonic.
5. A method for treating steel tubing comprising:
 - providing an elongated section of steel tubing having an outer circumferential surface and an inner circumferential surface defining an elongated axial passage through the tubing;
 - providing an impact member for travel through the length of the axial passage;
 - mounting a plurality of movable impactors to extend from the impact member;
 - driving the impactors for repeated contact with the inner circumferential surface; and
 - moving the impact member through the tubing so that the impactors contact the inner circumferential surface along the length of the axial passage.
6. The method as defined in claim 5 further comprising:
 - reciprocally driving the impactors.
7. The method as defined in claim 5 further comprising:
 - rotatably driving the impact member.
8. The method as defined in claim 5 further comprising:
 - ultrasonically moving the impactors.
9. An apparatus for treating steel tubing comprising:
 - an impact member;
 - a plurality of movable impactors mounted to extend from the impact member;
 - an impact driver connected to move the impactors into repeated contact with an interior surface of the tubing circumferentially surrounding the impact member;
 - an expansion mandrel movable along the interior surface for radially expanding the tubing; and
 - the impact member positioned to follow the mandrel through the tubing.
10. The apparatus as defined in claim 9 wherein the impact member is in a housing separate from the expansion mandrel.
11. The apparatus as defined in claim 10 wherein the impactors reciprocate radially from the housing.

12. An apparatus for treating steel tubing comprising:
 - an impact member;
 - a plurality of movable impactors mounted to extend from the impact member;
 - an impact driver connected to move the impactors into repeated contact with an interior surface of the tubing circumferentially surrounding the impact member; and
 - an expansion mandrel combined with the impact member and movable along the interior surface for radially expanding the tubing.
13. The apparatus as defined in claim 12 wherein the mandrel and the impact member are in a common housing.
14. The apparatus as defined in claim 13 wherein the impactors reciprocate from the housing.
15. A method for treating steel tubing comprising:
 - providing an elongated section of steel tubing having an outer circumferential surface and an inner circumferential surface defining an elongated axial passage through the tubing;
 - providing an impact member for travel through the length of the axial passage;
 - mounting a plurality of movable impactors to extend from the impact member;
 - driving the impactors for repeated contact with the inner circumferential surface;
 - moving an expansion mandrel through the tubing for radially expanding the tubing;
 - and
 - moving the impact member through the tubing subsequent to the expansion mandrel so that the impactors contact the expanded inner circumferential surface along the length of the axial passage.
16. The method as defined in claim 15 further comprising:
 - providing a housing for the impact member.
17. The method as defined in claim 16 further comprising:
 - reciprocating the impactors radially from the housing.
18. The method as defined in claim 16 further comprising:
 - rotating the impact member.
19. The method as defined in claim 16 further comprising:
 - reciprocating the impact members and rotating the housing.
20. A method for treating steel tubing comprising:
 - providing an elongated section of steel tubing having an outer circumferential surface and an inner circumferential surface defining an elongated axial passage through the tubing;
 - providing an impact member for travel through the length of the axial passage;
 - mounting a plurality of movable impactors to extend from the impact member;
 - driving the impactors for repeated contact with the inner circumferential surface; and

moving an expansion mandrel through the tubing for radially expanding the tubing, the mandrel combined with the impact member so that the impactors contact the inner circumferential surface along the length of the axial passage after expansion.

21. An apparatus for treating steel tubing comprising:

an elongated section of steel tubing having an OD and an ID defining an elongated axial passage through the tubing; and

an impact member movably positioned in the passage, the impact member including means for impacting the ID of the tubing sufficient to increase negative tensile residual stress at the ID.

22. A method for treating steel tubing comprising:


providing an elongated section of steel tubing having an OD and an ID defining an elongated axial passage through the tubing; and

moving an impact member through the passage for impacting the ID of the tubing sufficient to increase negative tensile residual stress at the ID.

23. A method for treating steel tubing comprising:

manufacturing an elongated section of steel tubing having an OD and an ID defining an elongated axial passage through the tubing; and

positioning and moving a mandrel through the passage sufficient to increase negative tensile residual stress at the ID.

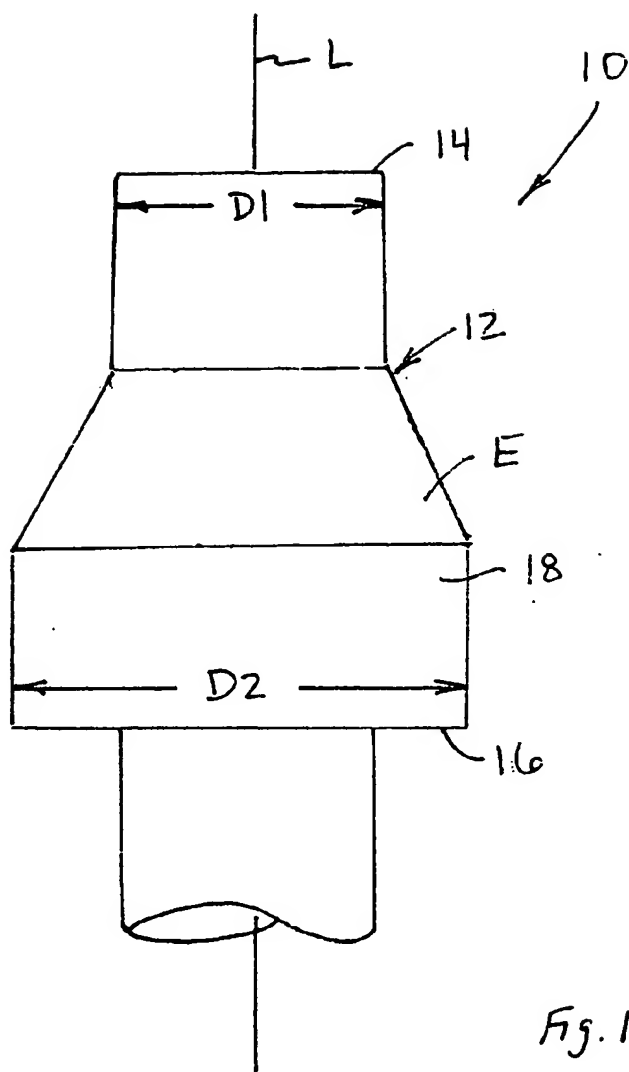

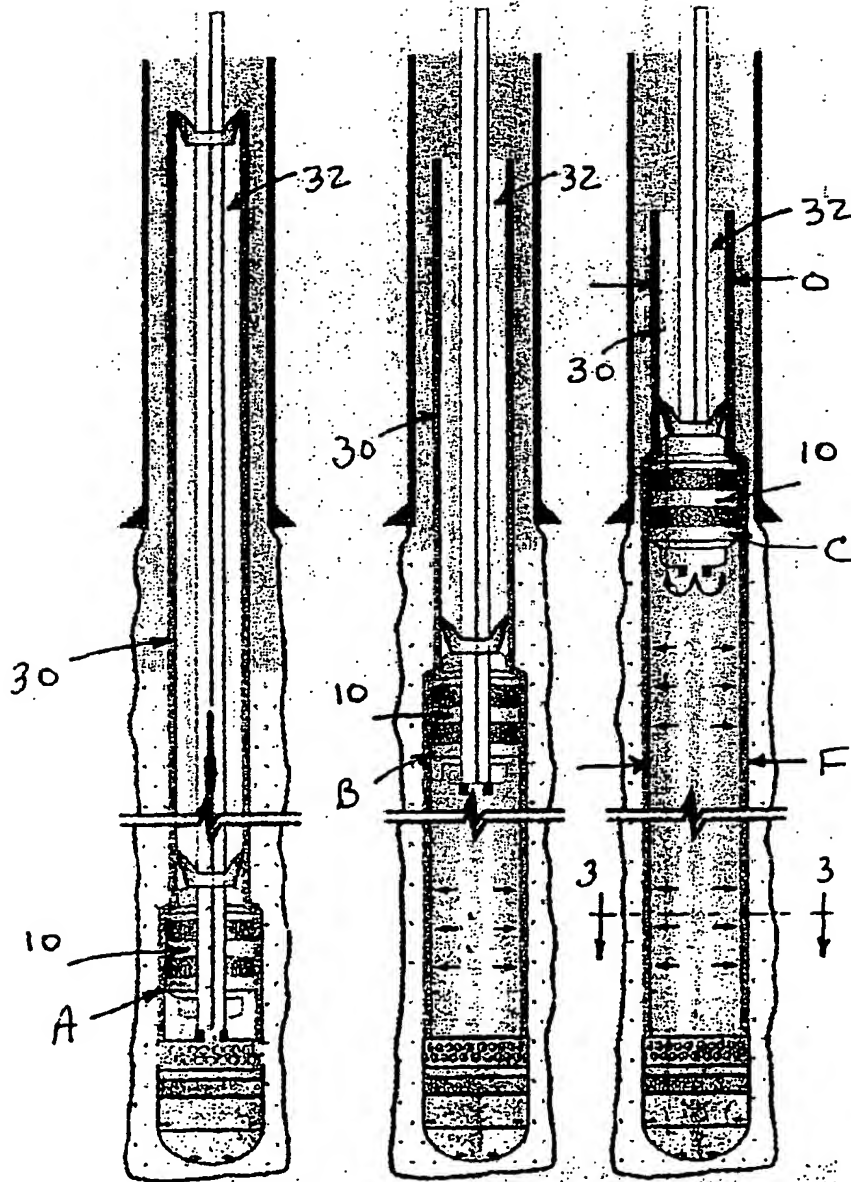


Fig. 2A

Fig. 2B

Fig. 2C

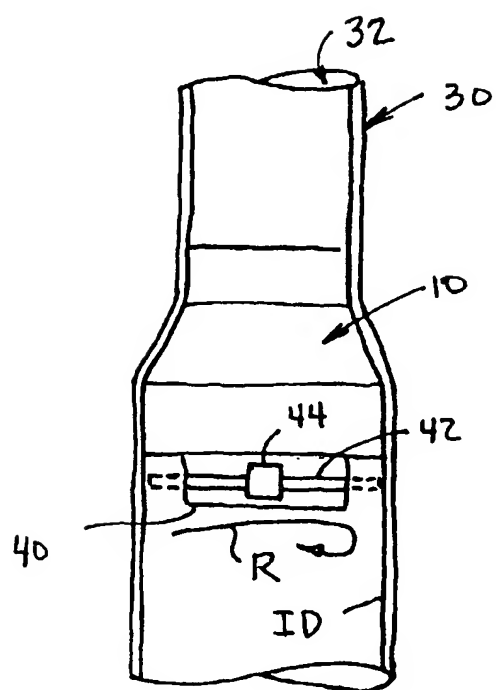


Fig. 4

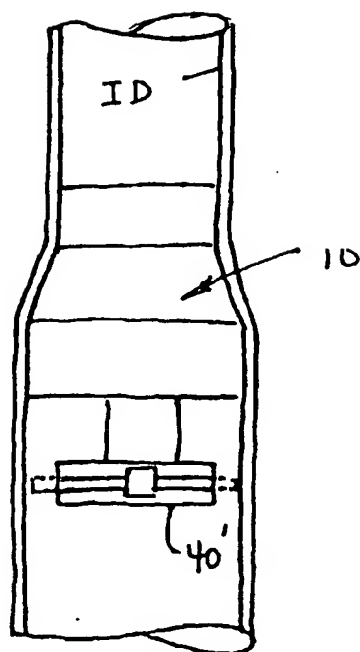


Fig. 5

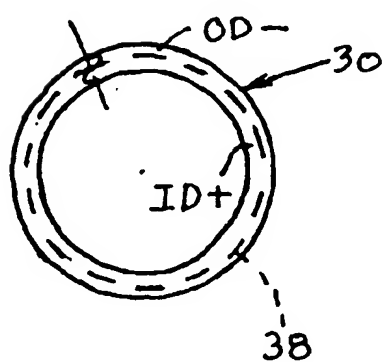


Fig. 3

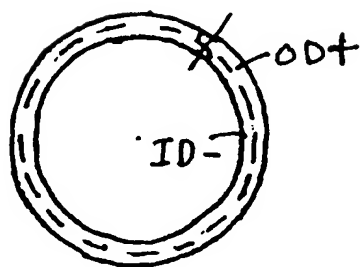


Fig. 6

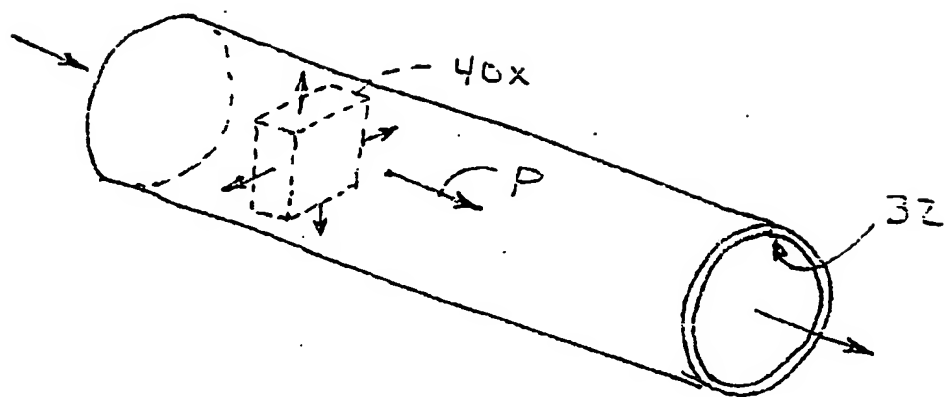


Fig. 7

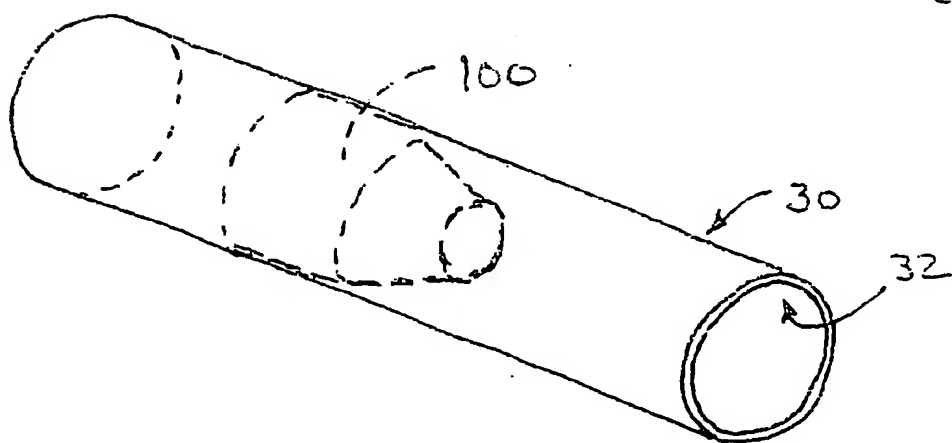


Fig. 8